


Bracket

Inconel® Advanced Milling

WIDIA HANITA



INCONEL® AFTER WATER JET

MACHINING




FINISHED BRACKET

1



ROUGH PREPARATION

Tool Dimensions	12 x 12 x 26-36 x 83 x R-0.5	
Description	Special VariMill III™ End Mill 77NE12025T	
Series	77NE 7 Flute	7VNX 7 Flute
Vc	50 m/min	164 SFM
S (RPM)	1,326	
F_z	0,07mm	0.0028"
F	650 mm/min	25.6 IPM
Ap	17mm	0.67"
Ae	0,6mm	0.0236"




See page 28 for product details.

2



ROUGH BIG POCKET

Tool Dimensions	12 x 12 x 48 x 100 x R-5.0	
Description	Special VariMill III™ End Mill	
Series	77NE 7 Flute	7VNX 7 Flute
Vc	50 m/min	164 SFM
S (RPM)	1,326	
F_z	0,07mm	0.0028"
F	650 mm/min	23.6 IPM
Ap	48mm	1.89"
Ae	0,6mm	0.023"

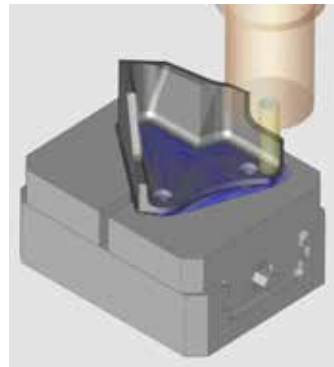


See page 28 for product details.

3



ROUGH ANGLED WALL

Tool Dimensions	12 x 12 x 26 x 83 x R-3.0	
Description	Special VariMill III™ End Mill	
Series	77NE 7 Flute	7VNX 7 Flute
Vc	50 m/min	164 SFM
S (RPM)	1,326	
F_z	0,07mm	0.0028"
F	650 mm/min	25.6 IPM
Ap	2,5mm	0.098"
Ae	0,6mm	0.0236"

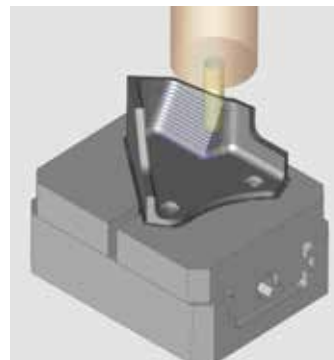

See page 28 for product details.

WIDIA

MACHINING BRILLIANCE

For more information, please contact your
local Authorized Distributor or visit widia.com

Bracket


Inconel® Advanced Milling

4



FINISH BIG POCKET

Tool Dimensions	12 x 12 x 48 x 100 x R-5.0	
Description	Special VariMill III™ End Mill	
Series	77NE 7 Flute	7VNX 7 Flute
Vc	46 m/min	151 SFM
S (RPM)	1,220	
F_z	0,07mm	0.0028"
F	600 mm/min	23.6 IPM
Ap	48mm	1.89"
Ae	0,5mm	0.002"



See page 28 for product details.




WIDIA™
SHINING
MOMENT

60% COST REDUCTION. REDUCED CYCLE TIME AND REDUCED TOOL COST PER PART!


**These four operations represent the majority of the solution*

	COMPETITOR	WIDIA
Cycle Time Full Process (min)	202	80

Cycle Time Full Process (min)



- 3 hours and 22 minutes cycle time with competitor tool.
- With the improved process, WIDIA tools reduce cycle time to 1 hour and 2 minutes.

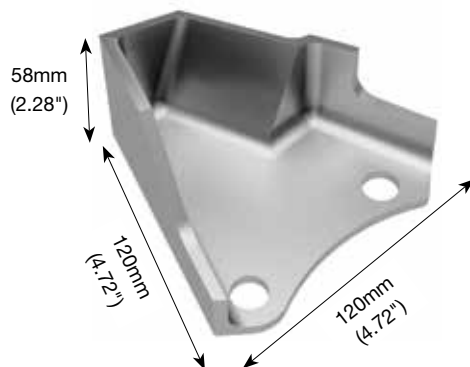

Aerospace Product Details



■ High-Performance Roughers

- Shallow pitch rougher.
- 4–6 flutes with variable spacing.
- Regular length of cut.
- Stainless steel and high-temp alloys.
- Center cutting.



	Series	Grade	(ZU) Flutes	(D1) Diameter Range
Inch	4U80	ALTIN-MT	4	5/16–1"
			6	5/8–1"
Metric			4	6–12mm
			6	16–25mm



■ High-Performance Solid Carbide End Mills • Roughing

- Center cutting.
- Flat shallow profile.
- Standard items listed. Additional styles and coatings made-to-order.
- Roughing profile also on radii portion of end mill.



	Series	Grade	(ZU) Flutes	(D1) Diameter Range
Inch	4969	WP15PE	4	.3937–.9843"
Metric				10–25mm




■ High-Performance Solid Carbide End Mills • VariMill™

- Unequal flute spacing.
- Center cutting.
- Ramping angle 3°.
- Optimized for difficult-to-machine workpiece materials.
- Semi-finishing to finishing applications.
- High-speed machining capability.
- Standard items listed. Additional styles and coatings made-to-order.



	Series	Grade	(ZU) Flutes	(D1) Diameter Range
Inch	7VNX	WS15PE	7	3/8–1"
Metric	77NE			10–25mm



■ High-Performance Solid Carbide End Mills • VariMill

- Shallow pitch rougher.
- 4–6 flutes with variable spacing.
- Regular length of cut.
- Stainless steel and high-temp alloys.
- Center cutting.



	Series	Grade	(ZU) Flutes	(D1) Diameter Range
Inch	5V0T	ALTIN-MT	5	1/4–3/4"
Metric	57N8			6–25mm

These pages overview the details for the products presented in the operations throughout this catalog



■ X-Feed™

- Designed for high-feed rates.
- 6 flutes and 3 x D diameter neck reach.
- Designed for circular plunging and ramping, 3D machining, face milling, and pocketing applications.
- Stainless steel and high-temp alloys.
- Improved tool life due to reduced radial forces.



	Series	Grade	(ZU) Flutes	(D1) Diameter Range
Inch	7FNS	ALTIN-MT	6	1/4–1"
Metric	7ONS			6–25mm

New Advances products launching January 1, 2019



■ Solid Carbide Drills

- Low thrust.
- Excellent centering capabilities.
- Easy to regrind.
- Reduces risk of chip jamming and catastrophic failure.
- Improves hole straightness.
- Improves hole alignment when drilling through cross holes and inclined exits.




Series	Grade	L:D	(D1) Inch Diameter	(D1) Metric Diameter
TDD105Z	WU20PD	15xD	.1181–.5118"	3–13mm
TDD106Z		20xD		
TDD107Z		25xD		
TDD108Z		30xD		

All-Star items (not all diameters are included in the program.)



■ Solid Carbide Drills

- Excellent chip flow due to flute design and finish.
- New coating enables higher cutting speeds.
- Higher feed rates on stainless steels and duplex.
- Available for custom solutions, as well as step-drilling.
- Real 8 x D drill lengths.
- Cylindrical shank h6 for perfect runout.
- Double-margin design for critical operations.

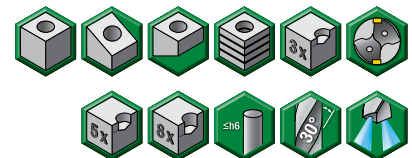

Series	Grade	L:D	(D1) Inch Diameter	(D1) Metric Diameter
TDS	WK15PD	3xD	.1181–.7874"	3–20mm
		5xD		
		8xD		

All-Star items (not all diameters are included in the program.)



■ Face Mills • Victory™ M1200 Series

- Twelve cutting edges.
- High feed rates for rough face milling.
- Use standard M1200 inserts.
- Do not load wiper inserts.



Series	Cutting Edges	(ZU) Flutes	(D1) Inch Diameter	(D1) Metric Diameter	All-Star
M1200™ Shell Mill	12	4	2"	50,8mm	NO
		5	2.5"	63,5mm	NO
		6	3"	76,2mm	YES
		8	4"	101,6mm	YES
		9	5"	127mm	NO

BENEFITS OF THIS BROCHURE

Advanced milling methods (i.e., high-speed, trochoidal, etc.) were used, which enabled the use of higher feeds and speeds beyond traditional methods published by WIDIA™. Use of tooling in advanced-application parameters is highly dependent on proper application of machining programming methods. Users may want to also want to consult their CAM system supplier on programming techniques for advanced milling.

ILLUSTRATED PROCESS STEPS


For each component, see actual strategies and tooling technologies specifically designed for aerospace.

1



ROUGHING HIGH MACHINING (ROUGH BIG POCKET)

Tool Dimensions	12 x 12 x 26 x 83 x R-3.0	
Description	Special VariMill III™ End Mill	
Series	77NE 7 Flute	7VNX 7 Flute
Vc	115 m/min	378 SFM
S (RPM)	3,052	3,052
F_z	0,1mm	0.0039"
F	2,136 mm/min	84 IPM
Ap	24mm	0.094"
Ae	0,6mm	0.0236"

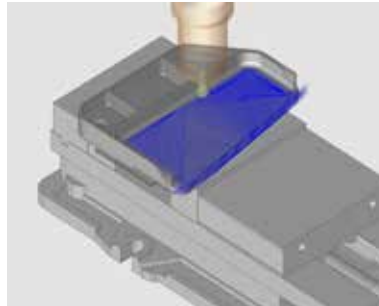

WIDIA SHINING MOMENTS

Each component includes a real-life customer case where WIDIA tooling technology and machining strategy came together to increase productivity and reduce cost!



	COMPETITOR	WIDIA
	Roughing AIRFOIL	
Specifications	16x16x15x83xR-1 6 Flutes	Based on 77NE 7 Flute
Workpiece Material	Titanium	
Width	230mm	
Length of Blade	420mm	
Total Milling Cycle Time	93 Minutes	62 Minutes

APPLICATION PARAMETERS


This cutting data shows real-life application parameters.



ROUGHING HIGH MACHINING (ROUGH BIG POCKET)

Tool Dimensions	12 x 12 x 26 x 83 x R-3.0	
Description	Special VariMill III™ End Mill	
Series	77NE 7 Flute	7VNX 7 Flute
Vc	115 m/min	378 SFM
S (RPM)	3,052	3,052
F_z	0,1mm	0.0039"
F	2,136 mm/min	84 IPM
Ap	24mm	0.094"
Ae	0,6mm	0.0236"

D1	=	12
D	=	12
Ap1 max	=	26
L	=	83
Rt	=	3.0

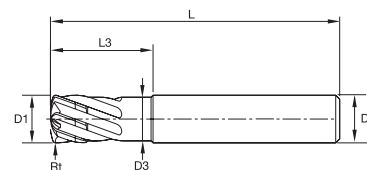

S (RPM)	=	Spindle Speed
F _z [IPT]	=	Feed per Tooth
F	=	Feed
Ap	=	Axial Depth of Cut
Ae	=	Radial Width of Cut
D1	=	Outer Diameter Tool
Rt	=	Radius
L	=	Length