

TOP DRILL S™ – PRODUCT RANGE



PRODUCT RANGE

	P	M	K	S	Coolant	Length	Diameter Range
TDS	401	451	411	451			3,0 – 20,0 mm
TDS	402	452	412	452			3,0 – 20,0 mm
TDS	403	453	413	453			3,0 – 20,0 mm

APPLICATIONS



GRADES

WP20PD

First choice for Steel drilling


WM15PD

First choice for Stainless Steel and Super Alloys drilling


WK15PD

First choice for Cast Iron drilling

MARGIN LANDS

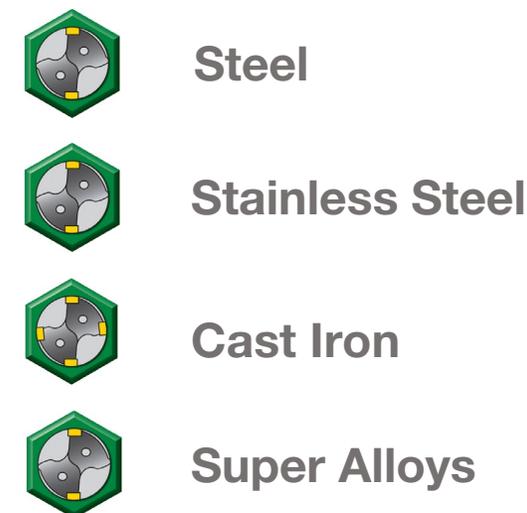

GEOMETRY

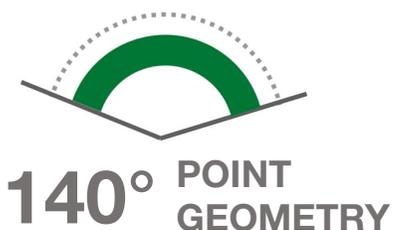

THE SHANK

A - Shank
DIN 6535 HA
(round cylindrical – metric – 2mm step)

